



Brochure

HatchTraveller

Chick Transport



HatchTraveller

Maintaining quality on the road

During the first days of its life, a chick is unable to regulate its own body temperature. Because of this, perfect transport conditions are necessary to maintain chick quality when delivering them from the hatchery to the poultry house. If the chick's body temperature is kept at a constantly stable 104°F, it will not have to waste valuable nutritional energy – which is a key factor in safeguarding chick quality during transport.

Maximizing chick quality

The HatchTraveller is equipped with a unique climatecontrol system that is based on HatchTech's laminar airflow technology and patented perforated radiators. The system ensures that the temperature of every chick in the truck is kept at a constant 104°F – the neutral body temperature zone which enables chicks to make optimum use of its nutrients (yolk). This gives it the best possible start for growth and ongoing development, so that it can later achieve its full growth potential.





Increased transport capacity

In the unique HatchTraveller concept, chick baskets are placed side-by-side – no space in between is required. This makes it possible to transport significantly more day-old chicks – up to 30% per truckload – compared to traditional transport systems of equal dimensions. What's more, when baskets are in this side-by-side position, the treated air is automatically forced through the baskets, and is not deflected around them. When air passes evenly and directly by the chick, it makes it much easier for the chick to release its own heat, and stay at the ideal 104°F at all times.


How does it work?

The HatchTraveller is equipped with a unique climate control system, based on HatchTech's patented concept of laminar airflow:

- Directly driven fans continuously force air through the perforated radiators, ensuring uniform airflow inside the truck.
- Unlike traditional systems, the air in the HatchTraveller does not escape around the baskets, but flows through the baskets – allowing the chicks in the baskets to effectively release their own heat to the air.

- This air passes through a radiator, where the heat is absorbed by the cooling medium within the radiator (a mix of glycol and water).
- Based on information from sensors, the temperature of the cooling medium in the radiators is continuously adjusted to keep the air in the truck at the perfect temperature.
- For air cooling, each radiator is linked to a chiller system which operates completely independently of outside air conditions.
- Outside air is only used for oxygen supply. A CO₂ sensor monitors and controls the air inlet.

These factors combined make it possible to transport more chicks at one time with the guarantee that optimum chick quality will be maintained.

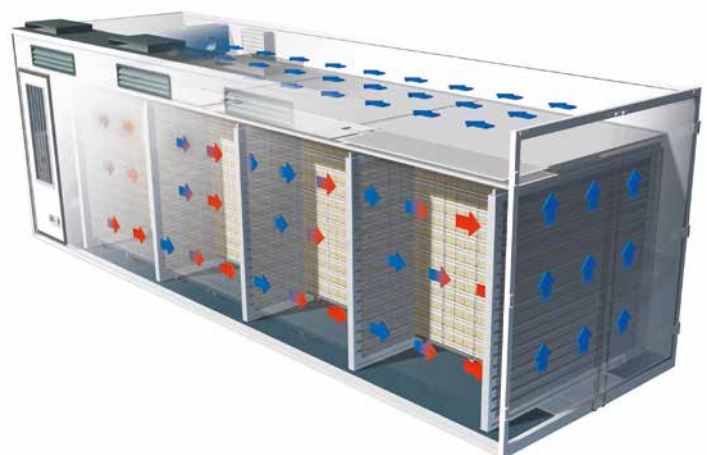



Technical information

Perfect in any and all climate conditions

Unlike traditional systems, the HatchTraveller functions completely independently of outside climate conditions. Whether it is hot or cold, day or night,



summer or winter – the conditions in the truck will always be completely stable and 100% controlled.

The HatchTraveller does not depend on the outside air for cooling, as this is completely done via the perforated radiators and the chillers they're linked to. The only time that the system's air inlet opens is when oxygen is required. This amount of outside air entering the system is so minimal, it will not interfere with the ambient temperature inside.

- Suitable for moderate and extreme climate conditions.
- Suitable for both plastic and cardboard crates (HatchTech baskets are recommended for their excellent air flow passage).
- Suitable for both chick and egg transport (on request).
- HatchTravellers can be connected to the electricity network, making it possible to use them as chick storage rooms at hatcheries or for ferry transport.

Excellent body and floor construction

The HatchTraveller is supplied as an independent box. The floor of the box is plain, but profiled, for easy cleaning and maximum grip, and does not feature any hard-to-clean ventilation channels. Doors and panels are constructed of first-class insulated panels for maximum strength.

- Self-supporting insulated floor: 115 mm; suitable for installation on any brand of truck chassis.
- Insulated wall panels: 45 mm; panels are smooth and easy to clean.
- Insulated rear doors: 65 mm; equipped with stainless steel rear portal.
- Equipped with stairs and outside illumination according to EU regulations.

Fully automated system

The HatchTraveller is a complete automated and controlled system.

- Full-color, touch-screen controller in the driver's cabin.
- Continuous monitoring and registration of:
 - Air temperatures
 - CO₂ levels
 - Humidity levels
- Contains back-up facilities (cooling and heating system, ventilation system and an energy power set) and manual control in case of emergencies.

Independent, stand-alone system

The HatchTraveller functions completely independently from the truck, except the fuel tank. And because the HatchTraveller will not depend on external air for cooling, the system will always function perfectly, even when the truck is not moving or moving slowly. When driving up hills, in traffic jams, or during driver breaks, the generator and cooling system will continue creating perfect climate conditions inside.




HatchTraveller Specifications



HatchTraveller is designed to offer excellent compatibility with a wide range of transport baskets and dollies. The system is fitted with a unique laminar airflow system as standard, so that all baskets receive optimal airflow and cooling, irrespective of the basic design.

HatchTraveller 38400 (Box)	
Capacity	<i>With trolley (d.o.c.)</i>
HT 88 Basket	38,400
HT 75 Basket	32,000
HatchCare Basket	21,600
Dimensions	<i>External (mm)</i>
Length	4,500
Width	2,500
Height	2,800
Technical Specifications	
Weight (excl. load)	≈ 4,100 kg
Generator power supply	2 x 30 kVA / 24 kW
Chillers	2 x 10 kW
Air circulation	15,000 m ³ /h
Fresh air supply	0-2,800 m ³ /h
MicroClimer sections	2
Sensors	Temperature: 2
	CO ₂ : 1
	Humidity: 1
	Back-up temperature: 1
Ambient Temperature	
Range	-40 °C to +55 °C

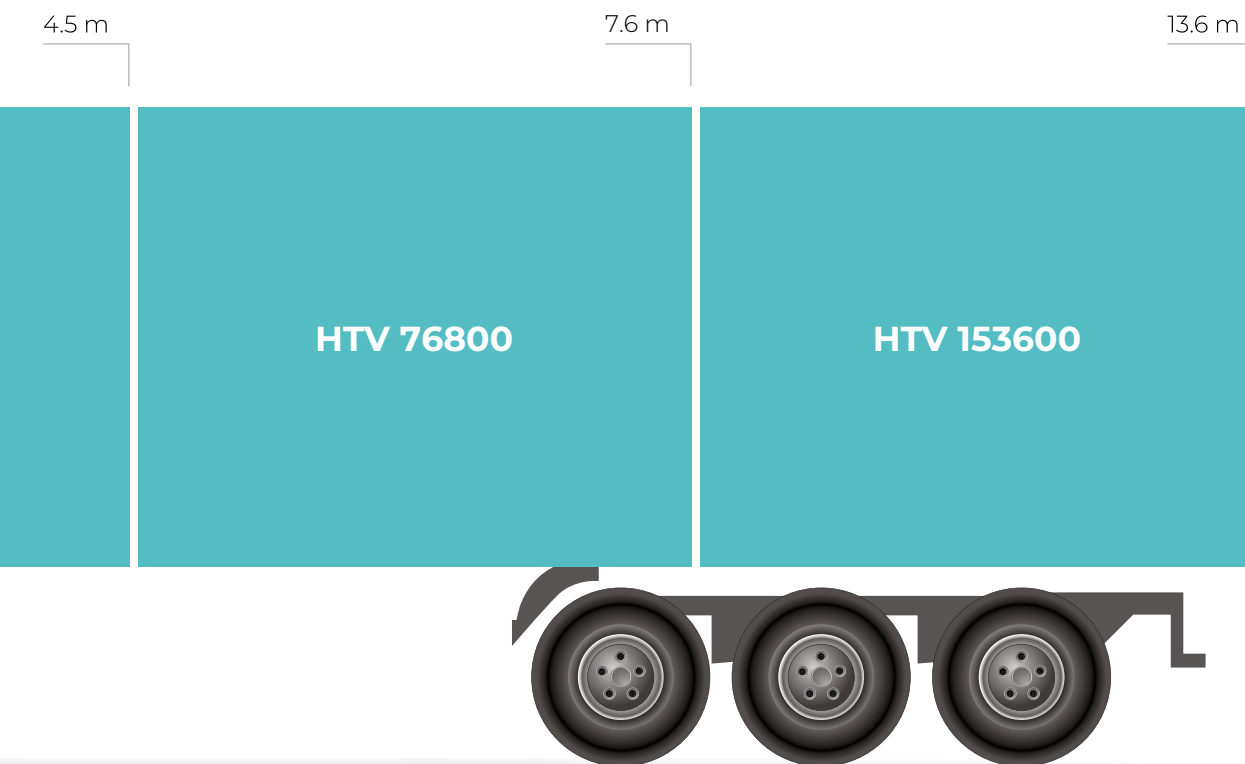

HatchTraveller 76800 (Box)	
Capacity	<i>With trolley (d.o.c.)</i>
HT 88 Basket	76,800
HT 75 Basket	64,000
HatchCare Basket	43,200
Dimensions	<i>External (mm)</i>
Length	7,624
Width	2,500
Height	2,800
Technical Specifications	
Weight (excl. load)	≈ 5,500 kg
Generator power supply	2 x 40 kVA / 32 kW
Chillers	3 x 10 kW
Air circulation	15,000 m ³ /h
Fresh air supply	0-2,800 m ³ /h
MicroClimer sections	4
Sensors	Temperature: 3 CO ₂ : 1 Humidity: 1 Back-up temperature: 1
Ambient Temperature	
Range	-40 °C to +55 °C

HatchTraveller 153600 (Includes trailer)	
Capacity	<i>With trolley (d.o.c.)</i>
HT 88 Basket	153,600
HT 75 Basket	128,000
HatchCare Basket	86,400
Dimensions	<i>External (mm)</i>
Length	13,600
Width	2,500
Height	4,000
Technical Specifications	
Weight (excl. load)	≈ 12,500 kg
Generator power supply	2 x 60 kVA / 48 kW
Chillers	6 x 10 kW
Air circulation	15,000 m ³ /h
Fresh air supply	0-2,800 m ³ /h
MicroClimer sections	8
Sensors	Temperature: 6 CO ₂ : 1 Humidity: 1 Back-up temperature: 1
Ambient Temperature	
Range	-40 °C to +55 °C



© Copyright 2023. HatchTech B.V. All rights reserved.

The content of this document, including the collection, arrangement and assembly of text, data, graphics, logos, images and other material are subject to copyright, patent, trademark and other intellectual property rights of HatchTech.

The promotional content of this document is designed for its use as a resource to understand HatchTech and its products and services. Unless otherwise agreed any other use of the promotional content or proprietary content, including the reproduction, modification, distribution, transmission, republication, or display of the content, in whole or in part, of this document is strictly prohibited without the express written permission of HatchTech.

HatchTech makes no warranties or guaranties, express or implied, written or oral, as to the information and content, included in this document. HatchTech reserves the right to make changes to its products and specifications without prior notice.

HatchTech B.V.

Innovatielaan 3

NL-6745 XW

De Klomp

The Netherlands

E info@hatchtech.com

T +31 (0)318 512511

www.hatchtraveller.com

